



1600, 2070W AND 2400

RUGGED

LOW MAINTENANCE


MOWERS



FOR TOPPING AND MOWING HAY AND SILAGE

OPTIONS

**options may differ in your country*

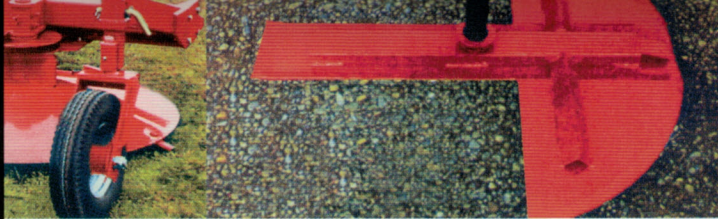

***OPTIONS:** Skid Replacement Wheel (above left), Stone guards (above right), Topping Skirt (not shown), Windrow Spreader (see over)



Mower folded back, close to tractor, for easy transportation.



The wind-row spreader – spreads the mown crop evenly, decreasing drying time.



Wind-row effect of mown crop with wind-row spreader removed.

TECHNICAL SPECIFICATIONS	1600	2070W	2400
Cutting Width	1.60m (5 3)	2.07m (6 9)	2.4m (8)
Number of Drums	2	2	2
Number of Double Edged Blades	6	6	8
Power Requirements (at 540 rpm)	From 30HP	From 45HP	From 65HP
Tractor Linkage	Cat I or II	Cat I or II	Cat II
Height Adjustment	25-100mm (1 - 4)	25-100mm (1 - 4)	25-100mm (1 - 4)
Weight	390kg (850lbs)	450kg (1010lbs)	580kg (1275lbs)

enquire now from your authorised dealer



Video—www.reeseagri.com



FOR YOUR NEAREST DEALER AND FURTHER INFORMATION CONTACT:

New Zealand

REESE ENGINEERING LTD.
PALMERSTON NORTH, NEW ZEALAND
Tel: (06) 357 9323
Fax: (06) 354 3155
Email: reese@reese.co.nz
Website: www.reeseagri.com

Australia

REESE ENGINEERING LTD.
GEE LONG, VICTORIA, AUSTRALIA
FREEPHONE: 1-800-140-196
FREEFAX: 1-800-140-195
Email: reeseagri@bigpond.com
Website: www.reeseagri.com

USA

REESE AGRI-USA
BRAYMER, MISSOURI, USA
TOLLFREE: 800-432-4020
Fax: (660) 645 2214
Email: reese@reese.co.nz
Website: www.reeseagri.com