



3100 MOWER



RUGGED, LOW MAINTENANCE TRAILED MOWERS

FOR TOPPING AND MOWING HAY AND SILAGE



QUALITY PRODUCTS BUILT TO LAST




3100 MOWER

technical specifications


CUTTING WIDTH	3.1 metres (10'3")
NUMBER OF ROTORS	4
NUMBER OF DOUBLE EDGE BLADES	12
POWER REQUIREMENT (at 540 rpm)	from 70 HP
BLADE SPEED	72 m/s
TRACTOR LINKAGE	Trailed
HEIGHT ADJUSTMENT	25-300mm (1"-12")
TYRES	185/70 x 14
WEIGHT	1090kg (2450lbs)
MIN. HYDRAULIC PRESSURE REQUIRED	900psi
PRICE	



Proven design. Rugged, dependable construction. 3.1 metre (10'3") offset mowing width.

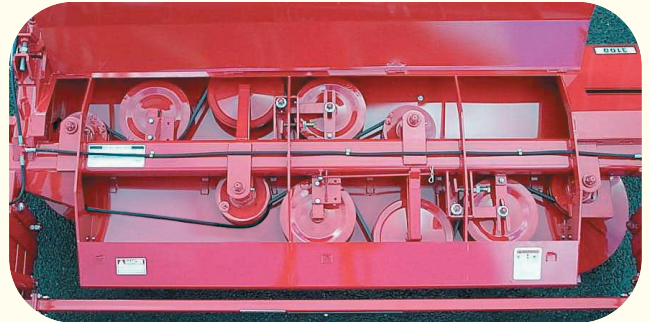

Proven low maintenance belt drive • Simple tension adjustment

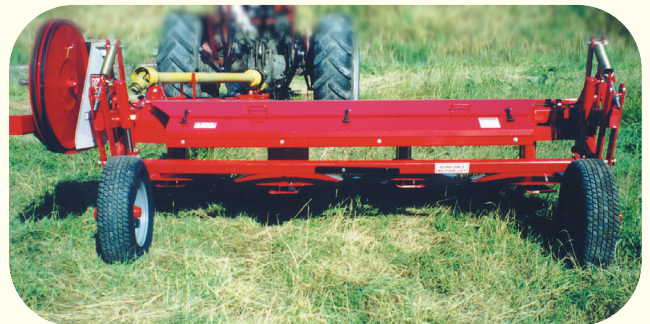

PTO Shaft with freewheel clutch • simple height and level adjustments • proven belt drive • compact 3.4 metre (12') transport width

enquire now from your authorised dealer



FOR YOUR NEAREST DEALER AND FURTHER INFORMATION CONTACT

New Zealand
 REESE ENGINEERING LTD,
 PALMERSTON NORTH, NEW ZEALAND.
 TEL: 06 357 9323.
 FAX: 06 354 3155.
 email: reese@xtra.co.nz
 WEBSITE: www.reese.co.nz
 www.aitchison.co.nz

Australia
 REESE ENGINEERING LTD,
 GEELONG, VICTORIA, AUSTRALIA.
 FREEPHONE: 1-800-140-196.
 FREEFAX: 1-800-140-195.
 email: reese@xtra.co.nz
 WEBSITE: www.reese.co.nz
 www.aitchison.co.nz

USA
 REESE AGRI-USA,
 BRAYMER, MISSOURI, USA.
 TEL: +1 660 645 2212.
 FAX: (660) 645 2214.
 email: reese@xtra.co.nz
 WEBSITE: www.reese.co.nz
 www.aitchison.co.nz